




EL 22

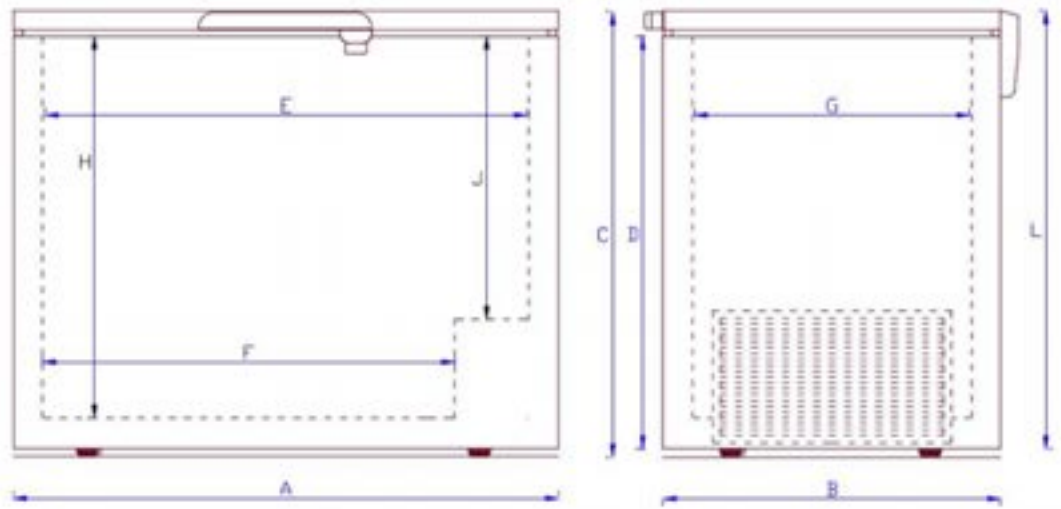

| | EL 22 |
|--|-------------|
| Ambient temperature range | +10 to +30 |
| Gross volume, litres | 215 |
| Net volume, litres | 205 |
| Temperature range inside unit | -14 to -22 |
| Standard refrigerant | R134a |
| Refrigerant available: R600a / R290/ R134a | Yes |
| Energy consumption / 24 h (kwh) at 18 deg | 0,71 |
| Input power (watt): | 124 |
| DIMENSIONS | |
| External dimensions [WxDxH] | 725x655x865 |
| Internal dimensions [WxDxH] | 606x536x697 |
| Dimension A | 725 |
| Dimension B | 655 |
| Dimension C | 865 |
| Dimension D | 780 |
| Dimension E | 606 |
| Dimension F | 406 |
| Dimension G | 536 |
| Dimension H | 697 |
| Dimension J | 447 |
| Dimension L | 850 |
| Insulation, mm | 60 |

| ACCESSORIES | |
|--------------------------------|-------------------|
| Dividers | Optional |
| Baskets Incl. | 1 |
| Max. Number of basket possible | 1 |
| Castors | Optional |
| Castors w. brakes | Optional |
| Lock | Incl. |
| Thermometer | Optional |
| OTHER DATA | |
| Outer cabinet | White |
| Inner cabinet | Aluminum |
| Inner cabinet: option | Steel inner liner |
| Type of cooling | Static |
| Type of defrost | Manual |
| Power | 220 v/ 50 Hz |
| Power 110 v/ 60 Hz | Optional |
| Thermostat | Analog |
| Freezing capacity kg/ 24 h | 15 |
| Light in Lid | Incl. |
| Calendar in Lid | Incl. |
| Net weight, kg | 43 |
| Gross weight, kg | 46 |
| SHIPPING | |
| 20' cont. Capacity | 42 |
| 40' cont. Capacity | 90 |
| 40' HC cont. Capacity | 126 |
| Standard Trailer capacity | 102 |